


## XT-15 by Pakboats

Tech Specs				
Paddler Weight	150 lbs	200 lbs	150 lbs	200 lbs
Cargo weight	none	none	100 lbs	100 lbs
Waterline length	14.19	14.29	14.38	14.44
Waterline beam	1.86	1.89	1.92	1.94
Draft	0.34	0.38	0.43	0.47
Prismatic coefficient	0.51	0.54	0.55	0.57
Block coefficient	0.34	0.36	0.39	0.41
Wetted surface in sq. ft.	19.80	21.43	22.84	24.15
Pounds to immerse one inch	93.83	99.29	103.21	106.20
Effective waterline length			14.14	
Volume, cu.ft.			14.64	
Center of buoyancy, % of length from bow			45.60	
<b>Metric equivalents</b>				
Paddler Weight	68.04 kg	90.72 kg	68.04 kg	90.72 kg
Cargo weight	none	none	45.46 kg	45.46 kg
Waterline length	4.56	4.65	4.73	4.79
Waterline beam	0.56	0.57	0.57	0.58
Draft	0.10	0.11	0.12	0.14
Prismatic coefficient	0.48	0.49	0.50	0.51
Block coefficient	0.37	0.39	0.41	0.42
Wetted surface in sq. meters	1.84	1.99	2.14	2.27
Kgs to immerse 2.54 cm	41.02	42.94	44.46	45.66
Effective waterline length			4.61	
Volume cubic meters			0.50	

Righting/Heeling Moments (Fixed-weight)

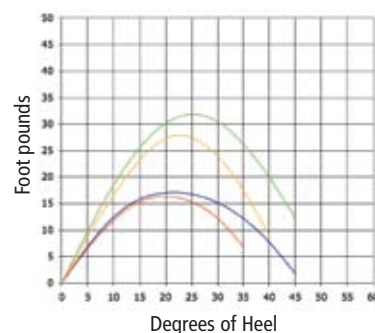

Stability Curves\*

- 150 lb. paddler, no cargo
- 200 lb. paddler, no cargo
- 150 lb. paddler, 100 lb. cargo
- 200 lb. paddler, 100 lb. cargo

\*Formula revised December 2009. (not comparable with stability graphs generated prior to December 2009.)

Measurements	
Length overall in decimal ft.	15.08
Beam in inches	24.75
Volume in cu. ft.	14.64
Cockpit width in inches	18.00
Cockpit length in inches	32.00
Coaming height forward, inches	13.00
Coaming height aft, inches	10.00
Height of seat in inches	2.50
Weight in pounds	41.50
<b>Metric Equivalents</b>	
Length overall in meters	4.60
Beam in meters	0.63
Volume in kiloliters	0.41
Cockpit width, cm	45.72
Cockpit length, cm	81.28
Coaming height forward, cm	33.02
Coaming height aft, cm	25.40
Height of seat, cm	6.35
Weight in kg	18.82